


[GB 312 240kW]

Dimensions

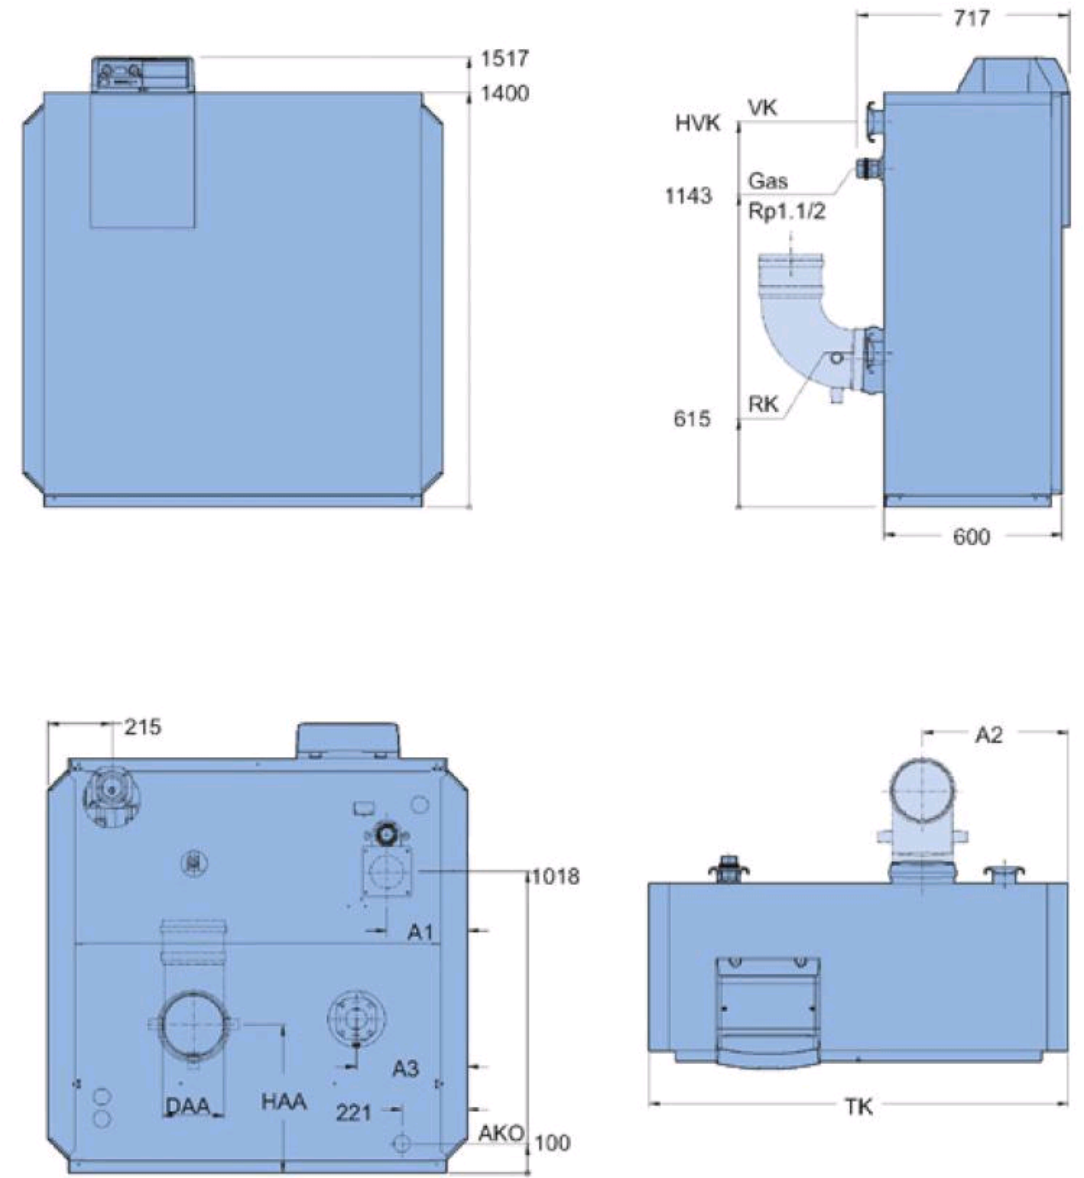

Parameter	Value
Height max incl. controls	1532mm
Width, T _K	1410mm
Width for access	612mm
Depth	625mm
Net weight	300kg
Flue gas connection, ♦ D _{AA} (internal)	200DN
Flue gas connection, H _{AA}	495mm
Flue gas connection, A ₂	488mm
Boiler flow connection, ♦ VK	DN 65
Boiler flow connection, H _{VK}	1300mm
Boiler flow connection	215mm
Boiler return connection, ♦ RK	DN 65
Boiler return connection, H _{RK}	615mm
Boiler return connection, A ₃	374mm
Safety valve, ♦ ST	Rp1 ♦ mm
Air sealed, ♦ RLU	110DN
Air sealed, H _{RLU}	1029mm
Air sealed, A ₁	373mm
Gas connection, ♦ GAS	R1 ♦
Gas connection, H _{GAS}	1143mm
Gas connection, A	221

Gas connection, A1	3/3mm
--------------------	-------

Technical Parameters

Parameter	Value
Output	240kW
Nominal heat output at 80/60 \blacklozenge C, Full load	225kW
Nominal heat output at 80/60 \blacklozenge C, Part load	66kW
Nominal heat output at 50/30 \blacklozenge C, Full load	240kW
Nominal heat output at 50/30 \blacklozenge C, Part load	75kW
Rated heat input, Part load	69kW
Rated heat input, Full load	232kW
Max working pressure	4bar
Max flow temperature	80 \blacklozenge C
Electrical power consumption, full load	270W
Electrical power consumption, part load	50W
Gas pressure	17-24 mbar
Water content	27l
Electrical ingress protection	IP 40
CE certification, product ID no.	CE 0085BP5508
Pressure at flue outlet	100Pa
Water flow resistance, Δ T 20K	89mbar
Safety temperature letter	100 \blacklozenge C
Electrical connection	230V _{AC} 50Hz
Efficiency (NCV)	108%
Flue gas temperature at 50/30 \blacklozenge C, Full load	55 \blacklozenge C
Flue gas temperature at 50/30 \blacklozenge C, Part load	33 \blacklozenge C
Flue gas temperature at 80/60 \blacklozenge C, Full load	75 \blacklozenge C
Flue gas temperature at 80/60 \blacklozenge C, Part load	56 \blacklozenge C
Flue gas mass flow rate at 50/30 \blacklozenge C, Full load	106g/s
Flue gas mass flow rate at 50/30 \blacklozenge C, Part load	30.2g/s
Flue gas mass flow rate at 80/60 \blacklozenge C, Full load	105g/s
Flue gas mass flow rate at 80/60 \blacklozenge C, Part load	32.4g/s
CO ₂ content, Full load	9.1%
CO ₂ content, Part load	9.3%
Sound emission level, Full load	55dB(A)
Sound emission level, Part load	40dB(A)