


[GB 162 160kW]

Dimensions

TL2 configuration

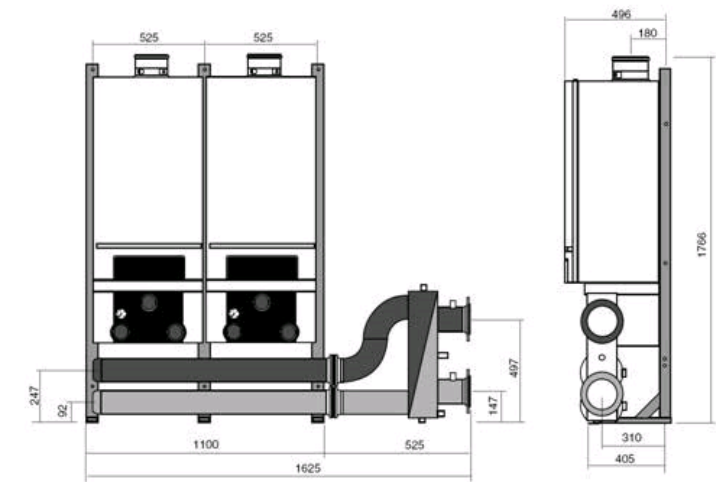


Parameter	Value
GB162 - 80	2
GB162 - 100	-
Height (excluding flue adaptor)	1710mm
Length (incl. straight LLH)	1625mm
Depth	496mm

Parts List

Part	Quantity
Main flow and return pipe TL2 NW65	1
Main gas pipe TL2 - 2"	1
Boiler piping set TL configuration	2
2" Low loss header	2
TL configuration supports	3
Connecting frame	2

TR2 configuration

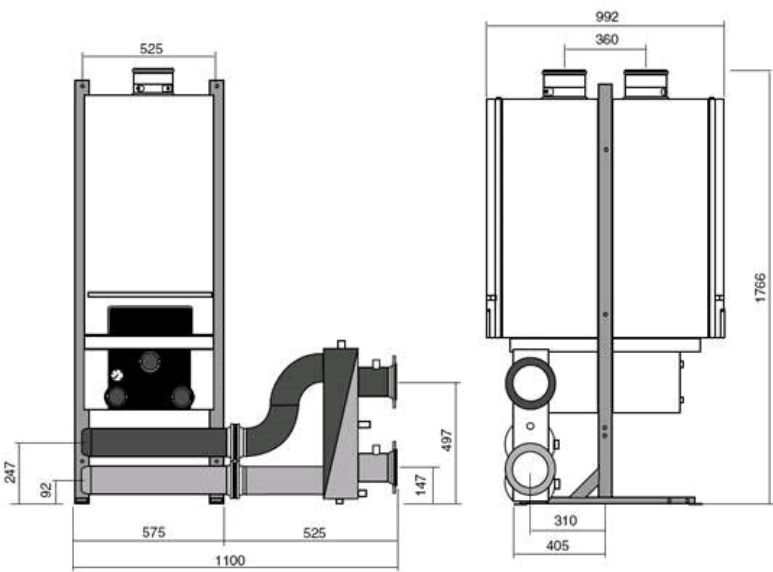

Parameter	Value
GB162 - 80	2
GB162 - 100	-
Height (excluding flue adaptor)	1710mm
Length (incl. straight LLH)	1100mm
Depth	992mm

Parts List

Part	Quantity
Main flow and return pipe TR2 NW65	1
Main gas pipe TR2 - 2"	1
Boiler piping set TR configuration	1
2❖" Low loss header	1
TR configuration supports	2
Connecting frame	1

Technical Parameters

Parameter	Value
Output	160kW
Heating water volume flow	7.2m ³ /h
Maximun gas consumption	19.9m ³ /h
Possibility of DHW + three-way valve	yes