


[GB 162 280kW]

Dimensions

TL3 configuration

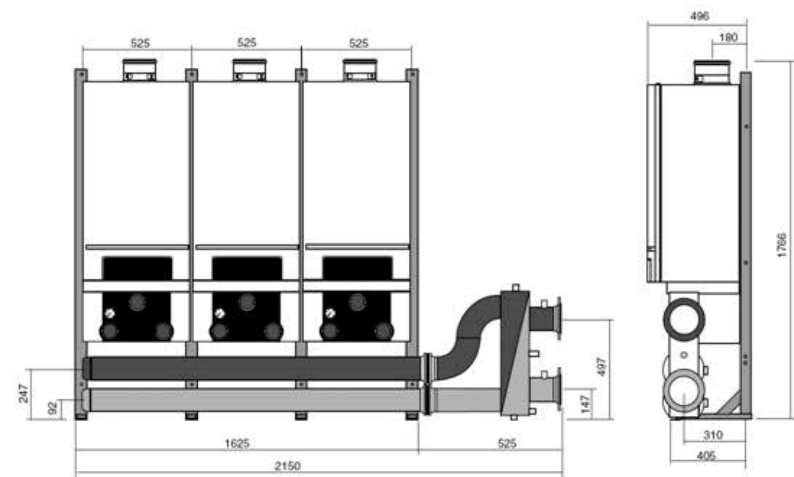


Parameter	Value
GB162 - 80	1
GB162 - 100	2
Height (excluding flue adaptor)	1710mm
Length (incl. straight LLH)	2150mm
Depth	496mm

Parts List

Part	Quantity
Main flow and return pipe TL3 NW65	1
Main gas pipe TL3 - 2"	1
Boiler piping set TL configuration	3
2" Low loss header	1
TL configuration supports	4
Connecting frame	3

TR3 configuration

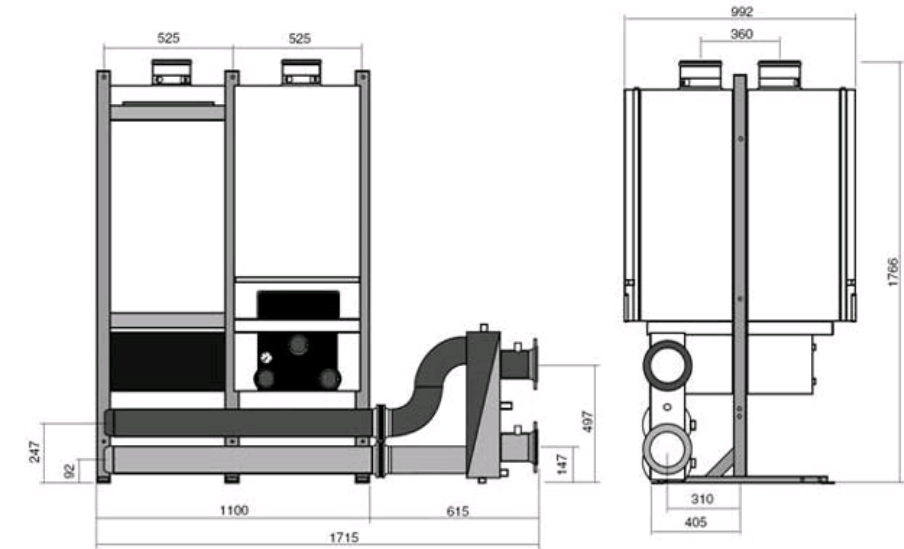

Parameter	Value
GB162 - 80	1
GB162 - 100	2
Height (excluding flue adaptor)	1710mm
Length (incl. straight LLH)	1715mm
Depth	992mm

Parts List

Part	Quantity
Main flow and return pipe TL4 NW80	1
Main gas pipe TR4 - 2"	1
Boiler piping set TL configuration	1
Boiler piping set TR configuration	2
3" Low loss header	1
TR configuration supports	3
Connecting frame	2

Technical Parameters

Parameter	Value
Output	280kW
Heating water volume flow	12.2m ³ /h
Maximun gas consumption	33.3m ³ /h
Possibility of DHW + three-way valve	yes