


[GB 162 400kW]

Dimensions

TL 4 configuration

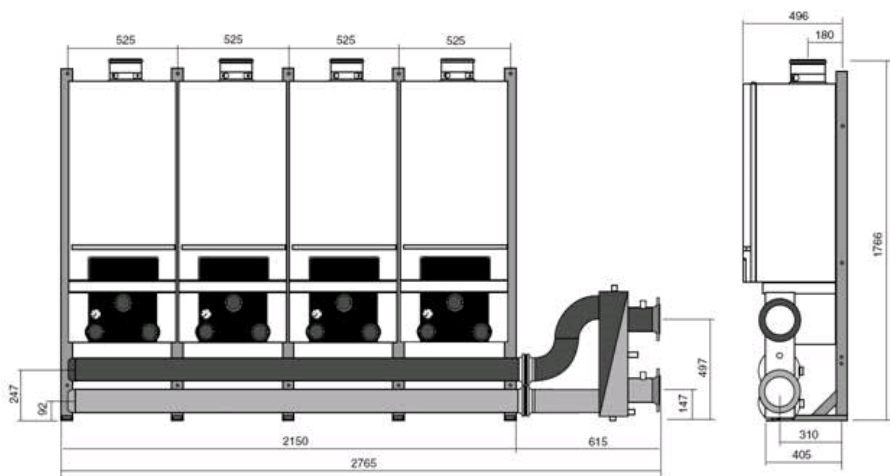


Parameter	Value
GB162 - 80	-
GB162 - 100	4
Height (excluding flue adaptor)	1710mm
Length (incl. straight LLH)	2765mm
Depth	496mm

Parts List

Part	Quantity
Main flow and return pipe TL4 NW80	1
Main gas pipe TL4 - 2"	1
Boiler piping set TL configuration	4
3" Low loss header	1
TL configuration supports	5
Connecting frame	4

TR4 configuration

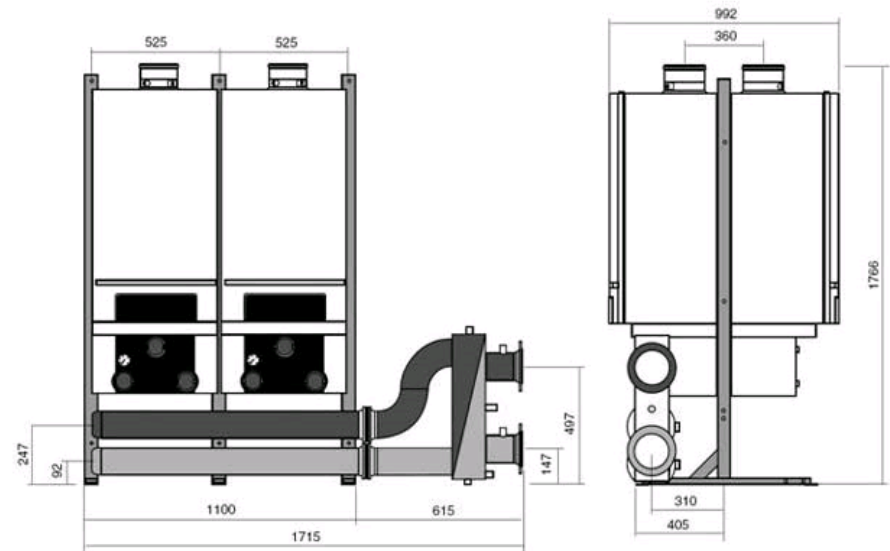

Parameter	Value
GB162 - 80	-
GB162 - 100	4
Height (excluding flue adaptor)	1710mm
Length (incl. straight LLH)	1715mm
Depth	992mm

Parts List

Parameter	Value
Main flow and return pipe TL4 NW80	1
Main gas pipe TR4 - 2"	1
Boiler piping set TL configuration	2
Boiler piping set TR configuration	2
3" Low loss header	1
TR configuration supports	3
Connecting frame	2

Technical Parameters

Parameter	Value
Output	400kW
Heating water volume flow	17.2m ³ /h
Maximun gas consumption	46.8m ³ /h
Possibility of DHW + three-way valve	no