


[GB 162 500kW]

Dimensions

TL5 configuration

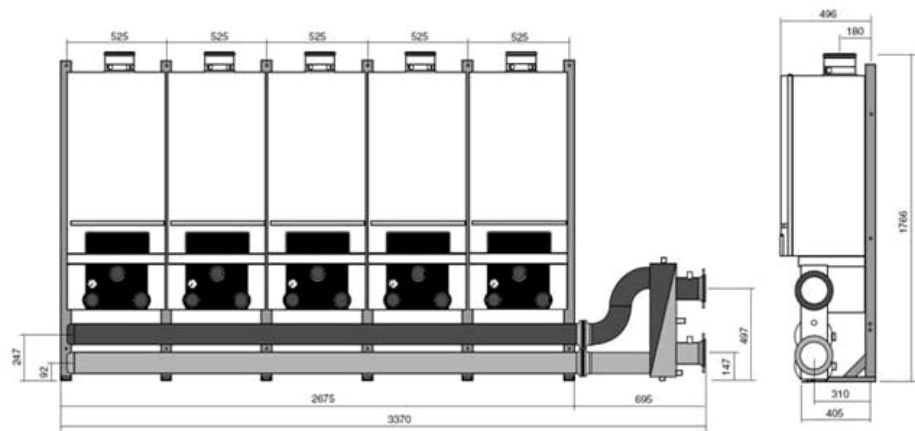


Parameter	Value
GB162 - 80	-
GB162 - 100	5
Height (excluding flue adaptor)	1710mm
Length (incl. straight LLH)	3370mm
Depth	496mm

Parts List

Part	Quantity
Main flow and return pipe TL5 NW100	1
Main gas pipe TL5 - 2"	1
Boiler piping set TL configuration	5
4" Low loss header	1
TL configuration supports	6
Connecting frame	5

TR5 configuration

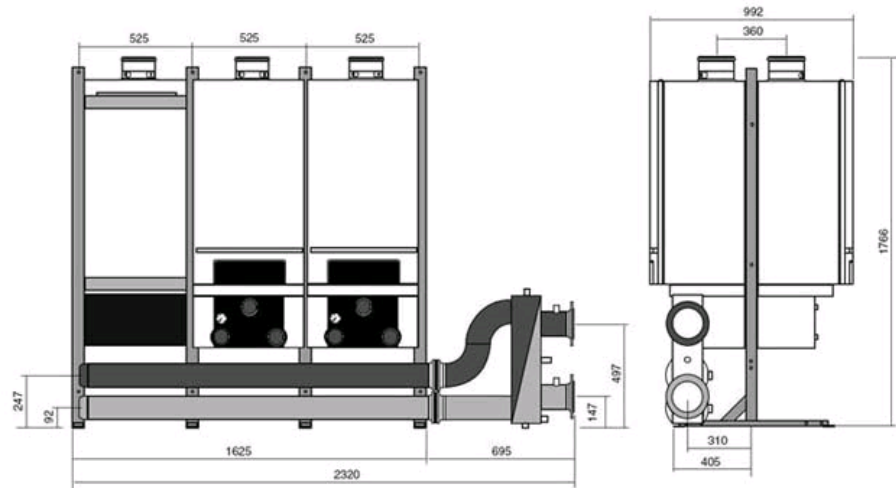

Parameter	Value
GB162 - 80	-
GB162 - 100	5
Height (excluding flue adaptor)	1710mm
Length (incl. straight LLH)	2320mm
Depth	992mm

Parts List

Parameter	Value
Main flow and return pipe TL5 NW100	1

Main gas pipe TR6 - 3"	1
Boiler piping set TL configuration	2
Boiler piping set TR configuration	3
4" Low loss header	1
TR configuration supports	4
Connecting frame	3

Technical Parameters

Parameter	Value
Output	500kW
Heating water volume flow	21.5m <sup>3</sup> /h
Maximun gas consumption	58.5m <sup>3</sup> /h
Possibility of DHW + three-way valve	no