


[GB 162 600kW]

Dimensions

TL6 configuration

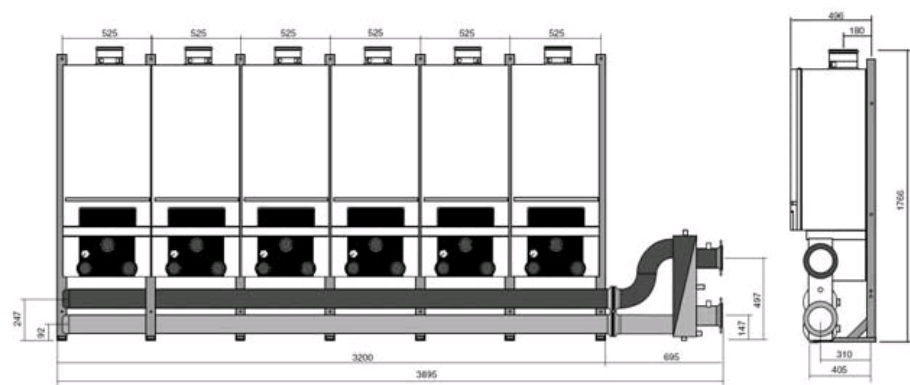


Parameter	Value
GB162 - 80	-
GB162 - 100	6
Height (excluding flue adaptor)	1710mm
Length (incl. straight LLH)	3895mm
Depth	496mm

Parts List

Part	Quantity
Main flow and return pipe TL6 NW100	1
Main gas pipe TL6 - 3"	1
Boiler piping set TL configuration	6
4" Low loss header	1
TL configuration supports	7
Connecting frame	6

TR6 configuration

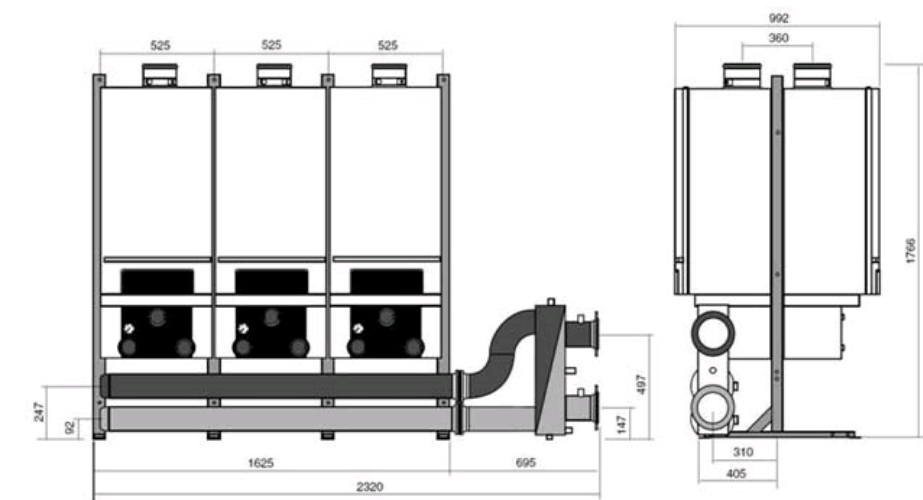

Parameter	Value
GB162 - 80	-
GB162 - 100	6
Height (excluding flue adaptor)	1710mm
Length (incl. straight LLH)	2320mm
Depth	992mm

Parts List

Part	Quantity
Main flow and return pipe TL6 NW100	1
Main gas pipe TR6 - 3"	1
Boiler piping set TL configuration	3

Boiler piping set TR configuration	3
4" Low loss header	1
TR configuration supports	4
Connecting frame	3

Technical Parameters

Parameter	Value
Output	600kW
Heating water volume flow	25.8m <sup>3</sup> /h
Maximun gas consumption	70.2m <sup>3</sup> /h
Possibility of DHW + three-way valve	no