


[GB 162 660kW]

Dimensions

TL7 configuration

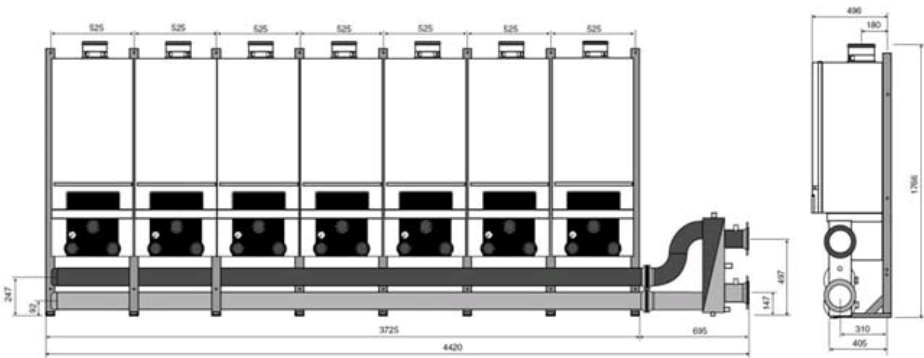


Parameter	Value
GB162 - 80	2
GB162 - 100	5
Height (excluding flue adaptor)	1710mm
Length (incl. straight LLH)	4420mm
Depth	496mm

Parts List

Part	Quantity
Main flow and return pipe TL7 NW100	1
Main gas pipe TL7 - 3"	1
Boiler piping set TL configuration	7
4" Low loss header	1
TL configuration supports	8
Connecting frame	7

TR7 configuration

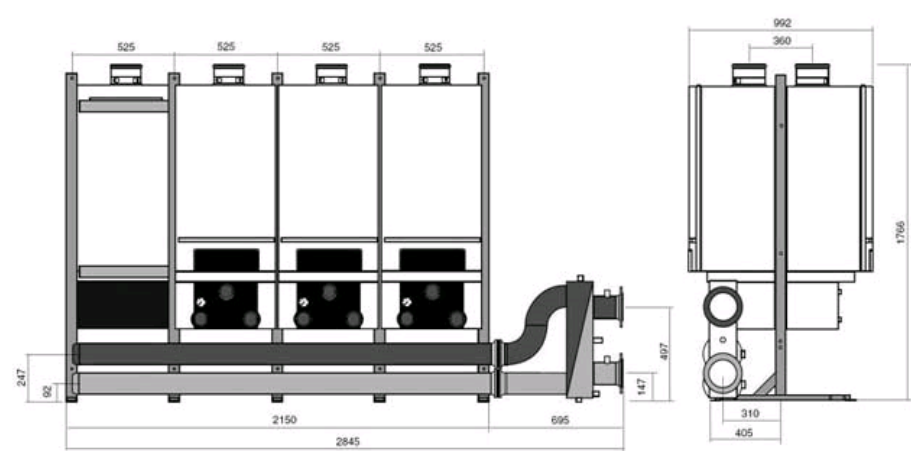

Parameter	Value
GB162 - 80	2
GB162 - 100	5
Height (excluding flue adaptor)	1710mm
Length (incl. straight LLH)	2845mm
Depth	992mm

Parts List

Part	Quantity
Main flow and return pipe TR8 NW100	1
Main gas pipe TR8 - 3"	1
Boiler piping set TL configuration	3
Boiler piping set TR configuration	4
4" Low loss header	1

TR configuration supports	5
Connecting frame	4

Technical Parameters

Parameter	Value
Output	660kW
Heating water volume flow	28.7m <sup>3</sup> /h
Maximun gas consumption	78.4m <sup>3</sup> /h
Possibility of DHW + three-way valve	yes